

PINGHU SHUANGXI BABY CARRIER MANUFACTURE CO., LTD.

TEST REPORT

SCOPE OF WORK:

EMC directive (2014/30/EU) – EMC report

Model:

SX1919

REPORT NUMBER

191202472SHA-001

ISSUE DATE

December 31, 2019

DOCUMENT CONTROL NUMBER

TTRF55014-01_V1

© 2018 Intertek



Report no. 191202472SHA-001

Applicant : PINGHU SHUANGXI BABY CARRIER MANUFACTURE CO., LTD.
XINCANG TOWN, PINGHU CITY, ZHEJIANG PROVINCE, CHINA

Manufacturer : PINGHU SHUANGXI BABY CARRIER MANUFACTURE CO., LTD.
XINCANG TOWN, PINGHU CITY, ZHEJIANG PROVINCE, CHINA

Manufacturing site : PINGHU SHUANGXI BABY CARRIER MANUFACTURE CO., LTD.
XINCANG TOWN, PINGHU CITY, ZHEJIANG PROVINCE, CHINA

Summary

The equipment complies with the requirements according to the following standard(s) or Specification:

EN 55014-1:2017: Electromagnetic compatibility - Requirements for household appliances, electric tools and similar apparatus Part 1: Emission

EN 55014-2:2015: Electromagnetic compatibility - Requirements for household appliances, electric tools and similar apparatus Part 2: Immunity – Product family standard

EN 61000-3-2:2014: Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions (equipment input current $\leq 16A$ per phase)


EN 61000-3-3:2013: Electromagnetic compatibility (EMC) - Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current $\leq 16A$ per phase and not subject to conditional connection

PREPARED BY:

REVIEWED BY:



Mark Shen
Project Engineer



Charles Zhang
Reviewer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Contents

| | |
|---|-----------|
| REVISION HISTORY..... | 5 |
| MEASUREMENT RESULT SUMMARY..... | 6 |
| 1. GENERAL INFORMATION | 7 |
| 1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT) | 7 |
| 1.2 DESCRIPTION OF TEST FACILITY | 8 |
| 2. TEST SPECIFICATIONS..... | 9 |
| 2.1 NORMATIVE STANDARDS..... | 9 |
| 2.2 MODE OF OPERATION DURING THE TEST..... | 10 |
| 2.3 TEST PERIPHERALS USED | 10 |
| 2.4 RECORD OF CLIMATIC CONDITIONS | 10 |
| 2.5 INSTRUMENT LIST | 11 |
| 2.6 MEASUREMENT UNCERTAINTY | 13 |
| EMISSION TEST | 14 |
| 3. MAINS/LOAD/CONTROL TERMINAL CONTINUOUS DISTURBANCE VOLTAGE..... | 14 |
| 3.1 TERMINAL VOLTAGE LIMITS FOR THE FREQUENCY RANGE 9KHZ TO 30MHZ | 14 |
| 3.1.1 <i>General limits</i> | 14 |
| 3.1.2 <i>Limits for mains port of tools</i> | 14 |
| 3.2 BLOCK DIAGRAM OF TEST SETUP | 15 |
| 3.3 TEST SETUP AND TEST PROCEDURE | 16 |
| 3.4 TEST PROTOCOL..... | 17 |
| 4. MAINS TERMINAL DISCONTINUOUS DISTURBANCE VOLTAGE/CLICK | 20 |
| 4.1 BLOCK DIAGRAM OF TEST SETUP | 20 |
| 4.2 TEST SETUP AND TEST PROCEDURE | 20 |
| 4.3 TEST PROTOCOL..... | 21 |
| 5. CONTINUOUS DISTURBANCE POWER | 22 |
| 5.1 CONTINUOUS DISTURBANCE POWER LIMIT..... | 22 |
| 5.2 BLOCK DIAGRAM OF TEST SET UP | 22 |
| 5.3 TEST PROCEDURE..... | 22 |
| 5.4 TEST PROTOCOL..... | 23 |
| 6. RADIATED EMISSION | 25 |
| 6.1 LIMIT | 25 |
| 6.2 BLOCK DIAGRAM AND TEST SET UP | 25 |
| 6.3 TEST PROTOCOL..... | 26 |
| 7. HARMONICS..... | 28 |
| 7.1 BLOCK DIAGRAM OF TEST SETUP | 28 |
| 7.2 TEST SETUP AND TEST PROCEDURE | 28 |
| 7.3 TEST PROTOCOL..... | 28 |
| 8. VOLTAGE FLUCTUATIONS-FLICKER..... | 29 |
| 8.1 BLOCK DIAGRAM OF TEST SETUP | 29 |
| 8.2 TEST SETUP AND TEST PROCEDURE | 29 |
| 8.2.1 <i>Definition</i> | 29 |
| 8.2.2 <i>Test condition</i> | 29 |
| 8.3 TEST PROTOCOL..... | 30 |
| IMMUNITY TEST | 31 |

- 9. ELECTROSTATIC DISCHARGE (ESD)..... 32**
 - 9.1 SEVERITY LEVEL AND PERFORMANCE CRITERION..... 32
 - 9.1.1 *Test level* 32
 - 9.1.2 *Performance Criterion*..... 32
 - 9.2 BLOCK DIAGRAM OF TEST SETUP 33
 - 9.3 TEST SETUP AND TEST PROCEDURE 34
 - 9.4 TEST PROTOCOL 35
- 10. ELECTROMAGNETIC FIELD SUSCEPTIBILITY 36**
 - 10.1 SEVERITY LEVEL AND PERFORMANCE CRITERION 36
 - 10.1.1 *Test level*..... 36
 - 10.1.2 *Performance Criterion* 36
 - 10.2 BLOCK DIAGRAM OF TEST SETUP 37
 - 10.3 TEST SETUP AND TEST PROCEDURE 37
 - 10.4 TEST PROTOCOL 37
- 11. ELECTRIC FAST TRANSIENT/BURST IMMUNITY TEST 38**
 - 11.1 SEVERITY LEVEL AND PERFORMANCE CRITERION 38
 - 11.1.1 *Test level*..... 38
 - 11.1.2 *Performance Criterion* 38
 - 11.2 BLOCK DIAGRAM OF TEST SETUP 39
 - 11.2.1 *Block Diagram for input a.c./d.c. power line*..... 39
 - 11.2.2 *Block Diagram for output a.c./d.c. power line or signal/control lines*..... 40
 - 11.3 TEST SETUP AND TEST PROCEDURE 40
 - 11.4 TEST PROTOCOL 41
- 12. SURGE IMMUNITY TEST 42**
 - 12.1 SEVERITY LEVEL AND PERFORMANCE CRITERION 42
 - 12.1.1 *Test level*..... 42
 - 12.1.2 *Performance Criterion* 42
 - 12.2 BLOCK DIAGRAM OF TEST SETUP 43
 - 12.3 TEST SETUP AND TEST PROCEDURE 43
 - 12.4 TEST PROTOCOL 43
- 13. IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY FIELDS..... 44**
 - 13.1 SEVERITY LEVEL AND PERFORMANCE CRITERION 44
 - 13.1.1 *Test level*..... 44
 - 13.1.2 *Performance Criterion* 44
 - 13.2 BLOCK DIAGRAM OF TEST SETUP 44
 - 13.3 TEST SETUP AND TEST PROCEDURE 45
 - 13.4 TEST PROTOCOL 46
- 14. VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY TEST47**
 - 14.1 SEVERITY LEVEL AND PERFORMANCE CRITERION 47
 - 14.1.1 *Test level*..... 47
 - 14.1.2 *Performance Criterion* 47
 - 14.2 BLOCK DIAGRAM OF TEST SETUP 48
 - 14.3 TEST SETUP AND TEST PROCEDURE 48
 - 14.4 TEST PROTOCOL 48
- APPENDIX I: PHOTOGRAPH OF EQUIPMENT UNDER TEST 49**

Revision History

| Report No. | Version | Description | Issued Date |
|------------------|---------|-------------------------|-------------------|
| 191202472SHA-001 | Rev. 01 | Initial issue of report | December 31, 2019 |
| | | | |
| | | | |

Measurement result summary

| TEST ITEM | TEST RESULT | NOTE |
|--|-------------|------|
| Mains terminal continuous disturbance voltage | Pass | |
| Mains terminal discontinuous disturbance voltage/click | NA | |
| Continuous disturbance power | Pass | |
| Radiated Emission | Pass | |
| Harmonics | Pass | |
| Voltage fluctuation-Flicker | Pass | |
| Electrostatic Discharge (ESD) | Pass | |
| RF electromagnetic field susceptibility | Pass | |
| Electric Fast Transient /Burst (EFT/B) | Pass | |
| Surge | Pass | |
| Injected Current | Pass | |
| Voltage dips and interruption | Pass | |

Notes:

1. NA =Not Applicable
2. Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.
3. Additions, Deviations and Exclusions from Standards: None.

1. GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name : RIDE ON CAR

Type/Model : SX1919

Brand name : -

Description of EUT : Tested the model SX1919 with the Charger: HKI-D12-1000.
The worst data has been listed as representative.

Rating : Battery: 12Vd.c.
Battery charger:
Input: 220-240VAC~, 50/60Hz
Output: 12VDC, 1000mA

Highest operating frequency : <108MHz

EUT type : Table-top
 Floor standing

EUT is toy, defined as
 Category A
 Category B
 Category C
 Category D
 Category E

Sample received date : December 25, 2019

Sample identification No. : 0191204-73

Date of test : December 25, 2019~ December 30, 2019

1.2 Description of Test Facility

Name : Intertek Testing Services Shanghai

Address : Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China

Telephone : 86 21 61278200

Telefax : 86 21 54262353

The test facility is recognized, certified, or accredited by these organizations :

- CNAS Accreditation Lab
Registration No. CNAS L0139
- FCC Accredited Lab
Designation Number: CN1175
- IC Registration Lab
CAB identifier.: CN0051
- VCCI Registration Lab
Registration No.: R-14243, G-10845, C-14723, T-12252
- A2LA Accreditation Lab
Certificate Number: 3309.02

2. TEST SPECIFICATIONS

2.1 Normative Standards

IEC 61000-4-2:2008: Electromagnetic Compatibility (EMC) – Part 4-2: testing and measurement techniques – electrostatic discharge immunity test

IEC 61000-4-3:2006+A1:2007+A1:2010: Electromagnetic Compatibility (EMC) – Part 4-3: testing and measurement techniques – radiated, radio frequency, electromagnetic field immunity test

IEC 61000-4-4:2012: Electromagnetic Compatibility (EMC) – Part 4-4: testing and measurement techniques – electric fast transient/burst immunity test

IEC 61000-4-5:2014: Electromagnetic Compatibility (EMC) – Part 4-5: testing and measurement techniques – section 5: surge immunity test

IEC 61000-4-6:2013: Electromagnetic Compatibility (EMC) – Part 4-6: testing and measurement techniques – section 6: immunity to conducted disturbance, induced by radio frequency field

IEC 61000-4-11:2004: Electromagnetic Compatibility (EMC) – Part 4-11: testing and measurement techniques –voltage dips, short interruption and voltage variations immunity test

IEC 61000-4-22:2010, Electromagnetic compatibility (EMC) – Part 4-22: Testing and measurement techniques – Radiated emissions and immunity measurements in fully anechoic rooms (FARs)

Note: there are no magnetic sensitive components included in this EUT and magnetic field immunity test according to EN 61000-4-8 is therefore not required.

2.2 Mode of operation during the test

Within this test report, EUT was tested under all available operation modes and tested under its rating voltage and frequency. Other voltage and frequency is specified if used.

2.3 Test Peripherals used

| Item No | Description | Band and Model | S/No |
|---------|-------------|----------------|------|
| 1 | - | - | - |

2.4 Record of climatic conditions

| Test Item | Temperature (°C) | Relative Humidity (%) | Pressure (Kpa) |
|--|------------------|-----------------------|----------------|
| Mains terminal continuous disturbance voltage | 24 | 48 | 101 |
| Mains terminal discontinuous disturbance voltage/click | NA | NA | NA |
| Continuous disturbance power | 24 | 48 | 101 |
| Radiated Emission | 27 | 52 | 101 |
| Harmonics | NA | NA | NA |
| Voltage fluctuation-Flicker | NA | NA | NA |
| Electrostatic Discharge (ESD) | 26 | 55 | 101 |
| RF electromagnetic field susceptibility | 27 | 52 | 101 |
| Electric Fast Transient /Burst (EFT/B) | 26 | 55 | 101 |
| Surge | 26 | 55 | 101 |
| Injected Current | 22 | 49 | 101 |
| Voltage dips and interruption | 26 | 55 | 101 |

Notes: NA =Not Applicable

2.5 Instrument list

| Conducted Emission / Disturbance Power / Tri-loop Test / CDN method | | | | | |
|---|-------------------------|-------------------|------------|--------------|------------|
| Used | Equipment | Manufacturer | Type | Internal no. | Due date |
| <input checked="" type="checkbox"/> | Test Receiver | R&S | ESCS 30 | EC 2107 | 2020-07-14 |
| <input checked="" type="checkbox"/> | A.M.N. | R&S | ESH2-Z5 | EC 3119 | 2020-11-28 |
| <input checked="" type="checkbox"/> | Absorbing clamp | R&S | MDS 21 | EC 2108 | 2020-06-13 |
| <input checked="" type="checkbox"/> | Shielded room | Zhongyu | - | EC 2838 | 2020-01-13 |
| Radiated Emission | | | | | |
| Used | Equipment | Manufacturer | Type | Internal no. | Due date |
| <input checked="" type="checkbox"/> | Test Receiver | R&S | ESIB 26 | EC 3045 | 2020-09-11 |
| <input checked="" type="checkbox"/> | Bilog Antenna | TESEQ | CBL 6112D | EC 4206 | 2020-06-09 |
| <input checked="" type="checkbox"/> | Semi-anechoic chamber | Albatross project | - | EC 3048 | 2020-07-30 |
| ESD | | | | | |
| Used | Equipment | Manufacturer | Type | Internal no. | Due date |
| <input checked="" type="checkbox"/> | ESD generator | TESEQ | NSG 437 | EC 4792-4 | 2020-03-27 |
| <input checked="" type="checkbox"/> | Shielded room | Zhongyu | - | EC 2839 | 2020-01-13 |
| EFT / Surge / Voltage Dips | | | | | |
| Used | Equipment | Manufacturer | Type | Internal no. | Due date |
| <input checked="" type="checkbox"/> | Conduct immunity system | EM TEST | UCS 500M6B | EC 2958 | 2020-04-02 |
| <input checked="" type="checkbox"/> | Automatic transformer | EM TEST | MV2616 | EC 2957 | 2020-04-02 |
| <input checked="" type="checkbox"/> | Shielded room | Zhongyu | - | EC 2839 | 2020-01-13 |
| Conducted Immunity | | | | | |
| Used | Equipment | Manufacturer | Type | Internal no. | Due date |
| <input checked="" type="checkbox"/> | Signal generator | R&S | SML 01 | EC 2338 | 2020-09-11 |
| <input checked="" type="checkbox"/> | Power amplifier | AR | 75A250 | EC 3043-1 | 2020-07-14 |
| <input checked="" type="checkbox"/> | Attenuator | EM TEST | ATT6/75 | EC 3043-3 | 2020-02-11 |
| <input checked="" type="checkbox"/> | CDN | Frankonia | CDN M2M316 | EC 5969 | 2020-03-28 |
| Radiated Immunity | | | | | |
| Used | Equipment | Manufacturer | Type | Internal no. | Due date |
| <input checked="" type="checkbox"/> | Signal generator | R&S | SMR 20 | EC 3044-1 | 2020-01-13 |
| <input checked="" type="checkbox"/> | Power amplifier | AR | 250W1000B | EC 5818-2 | 2020-04-14 |
| <input checked="" type="checkbox"/> | Log-period antenna | AR | AT 1080 | EC 3044-7 | 2020-03-04 |
| <input checked="" type="checkbox"/> | Fully-anechoic chamber | Albatross project | - | EC 3047 | 2020-07-30 |
| Additional instrument | | | | | |
| Used | Equipment | Manufacturer | Type | Internal no. | Due date |
| <input checked="" type="checkbox"/> | Therom- | ZJ1-2A | S.M.I.F. | EC 3783 | 2020-03-10 |

| | | | | | |
|-------------------------------------|-------------------|--------|-----------------|---------|------------|
| | Hygrograph | | | | |
| <input checked="" type="checkbox"/> | Therom-Hygrograph | ZJ1-2A | S.M.I.F. | EC 2323 | 2020-06-06 |
| <input checked="" type="checkbox"/> | Therom-Hygrograph | ZJ1-2A | S.M.I.F. | EC 5198 | 2020-02-27 |
| <input checked="" type="checkbox"/> | Therom-Hygrograph | ZJ1-2A | S.M.I.F. | EC 3325 | 2020-04-07 |
| <input checked="" type="checkbox"/> | Pressure meter | YM3 | Shanghai Mengde | EC 3320 | 2020-06-30 |

2.6 Measurement Uncertainty

| Measurement | Frequency | Expanded Uncertainty (k=2) (±) |
|---|----------------|--------------------------------|
| Conducted emission at mains ports | 9kHz ~ 150kHz | 3.71 dB |
| | 150kHz ~ 30MHz | 3.31 dB |
| Continuous disturbance voltage at telecom port with AAN | 150kHz ~ 30MHz | 4.10 dB |
| Continuous disturbance current at telecom ports | 150kHz ~ 30MHz | 2.73 dB |
| Mains terminal discontinuous disturbance voltage/click | - | 3.87 dB |
| Continuous disturbance power | 30MHz ~ 300MHz | 4.42 dB |
| Radiated Emissions up to 1 GHz | 30MHz ~ 1GHz | 5.04 dB |
| Radiated Emissions above 1 GHz | 1GHz ~ 6GHz | 4.97 dB |
| | 6GHz ~ 18GHz | 5.29 dB |
| Harmonic current emission | - | 3.90% |
| Voltage fluctuations and flicker | - | 10.34% |
| ESD | - | 6.65% |
| Radiated susceptibility | - | 2.38% |
| EFT test at main terminal | - | 11.57% |
| EFT test at signal/telecom terminal | - | 11.62% |
| Surge test at main terminal | - | 11.57% |
| Injected current test at main terminal | - | 1.88 dB |
| Injected current test at unshielded signal terminal | - | 3.41 dB |
| Voltage dips and interruption | - | 6.05% |

Emission Test

3. Mains/Load/Control Terminal Continuous Disturbance Voltage

Test result: PASS

3.1 Terminal Voltage Limits for the frequency range 9kHz to 30MHz

3.1.1 General limits

| Frequency range (MHz) | Mains ports | | Associated ports | | | |
|-----------------------|--|-----------|--|----|--|-----------|
| | Disturbance voltage | | Disturbance voltage | | Disturbance current | |
| | Limits dB(μV) Quasi-peak Average | | Limits dB(μV) Quasi-peak Average | | Limits dB(μV) Quasi-peak Average | |
| 0.15 ~ 0.5 | 66 ~ 56 * | 59 ~ 46 * | 80 | 70 | 40 ~ 30 * | 30 ~ 20 * |
| 0.5 ~ 5.0 | 56 | 46 | 74 | 64 | 30 | 20 |
| 5.0 ~ 30 | 60 | 50 | 74 | 64 | | |

Notes:
 1. * means the limit decreasing linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.
 2. If the quasi-peak measurements meet the average limit, the EUT shall be deemed to meet both limits and the measurements using the average detector need not be carried out.


3.1.2 Limits for mains port of tools

| Frequency range (MHz) | P ≤ 700 W | | 700 W < P ≤ 1 000 W | | P > 1 000 W | |
|-----------------------|---------------|---------|---------------------|---------|---------------|-----------|
| | Limits dB(μV) | | Limits dB(μV) | | Limits dB(μV) | |
| | Quasi-peak | Average | Quasi-peak | Average | Quasi-peak | Average |
| 0.15-0.35 | 66-59* | 59-49* | 70-63* | 63-53* | 76-69* | 69 ~ 59 * |
| 0.35-5 | 59 | 49 | 63 | 53 | 69 | 59 |
| 5-30 | 64 | 54 | 68 | 58 | 74 | 64 |

Notes:
 1. * means the limit decreasing linearly with the logarithm of the frequency in the range 0.15MHz to 0.35MHz.
 2. If the quasi-peak measurements meet the average limit, the EUT shall be deemed to meet both limits and the measurements using the average detector need not be carried out.

3.2 Block Diagram of Test Setup


At mains terminal

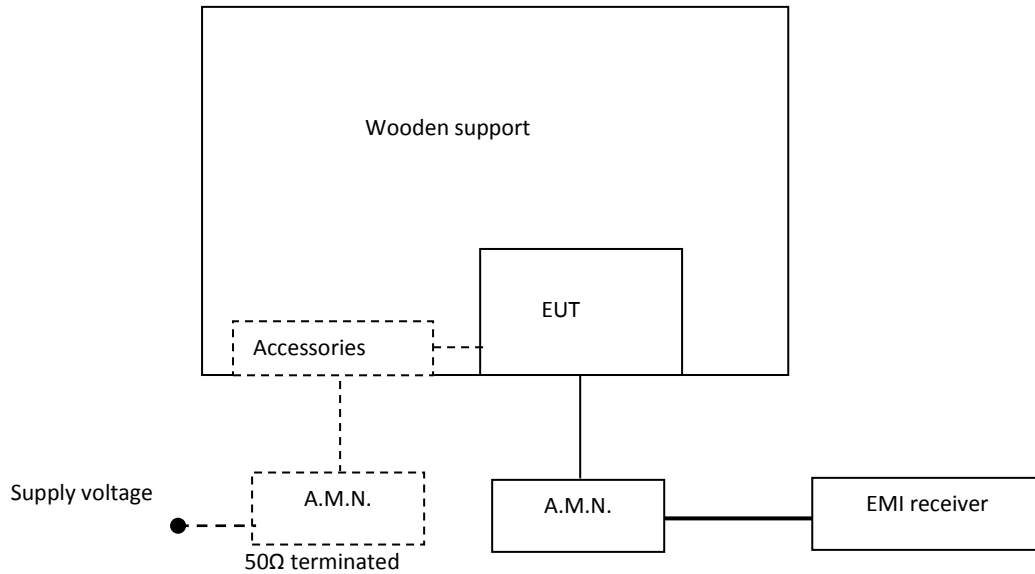

For table top equipment, wooden support is 0.8m height table

For floor standing equipment, wooden support is 0.1m height rack.

At Associated ports

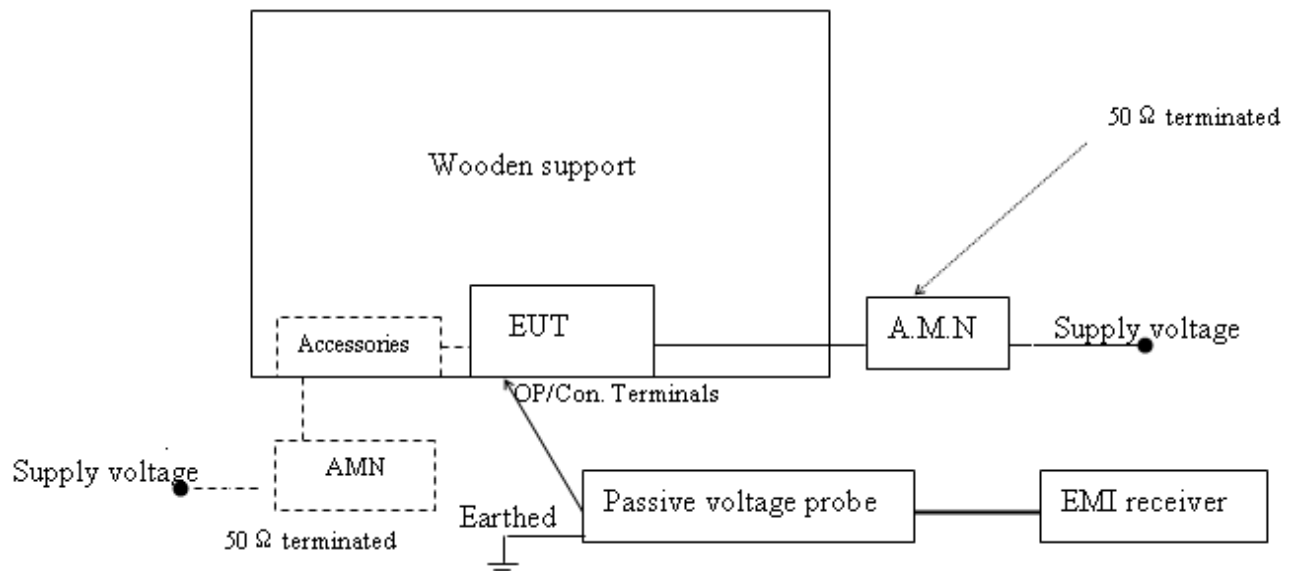

Note:
 ————— : power line
 ————— : signal line
 - - - - - : means the test setup while available

3.3 Test Setup and Test Procedure

Measurement was performed in shielded room, and instruments used were according to clause 5.1 of EN 55014-1 if applicable.

Detailed test procedure and arrangement was according to clause 5.2 of EN 55014-1.

Measurement methods was according to clause 5.4 of EN 55014-1.


Operation conditions of EUT was according to clause 6 of EN 55014-1.

Frequency range 150kHz – 30MHz was checked and EMI receiver measurement bandwidth was set to 9kHz.

3.4 Test Protocol

For Mains ports: Pass


L-Line:

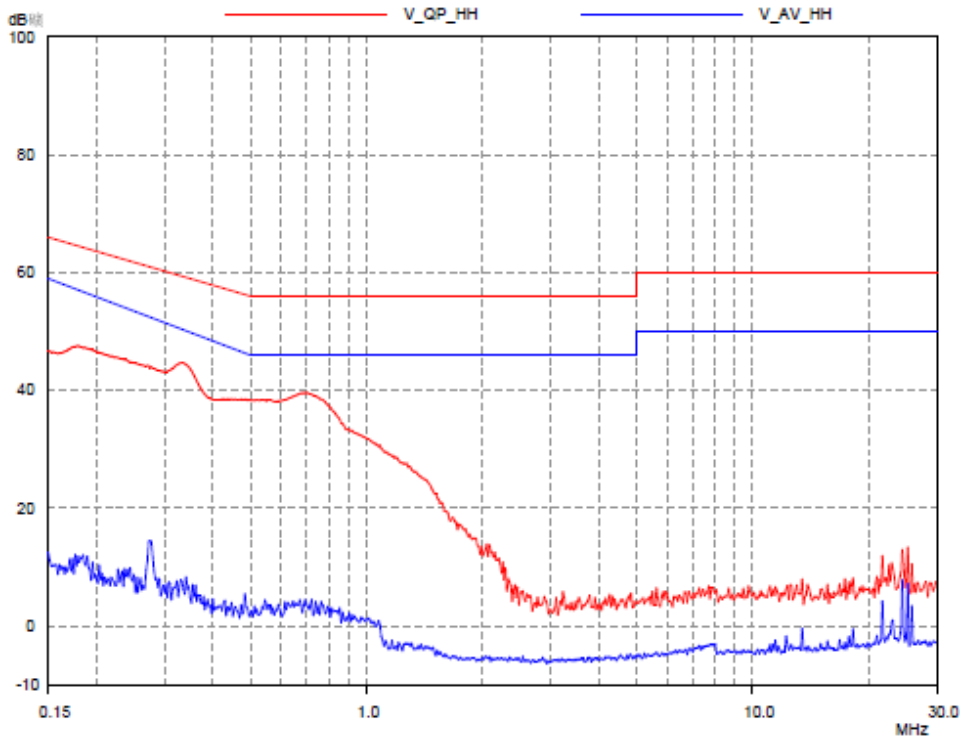

| Frequency (MHz) | Quasi-peak | | | Average | | |
|-----------------|--------------------------|--------------|-------------|--------------------------|--------------|-------------|
| | Corrected Reading (dBuV) | Limit (dBuV) | Margin (dB) | Corrected Reading (dBuV) | Limit (dBuV) | Margin (dB) |
| 0.18 | * | 64.41 | * | * | 56.94 | * |
| 0.24 | * | 61.76 | * | * | 53.49 | * |
| 0.61 | * | 56.00 | * | * | 46.00 | * |
| 0.83 | * | 56.00 | * | * | 46.00 | * |
| 1.36 | * | 56.00 | * | * | 46.00 | * |

Note: * means the emission level 10dB below the relevant limit.

N-Line:

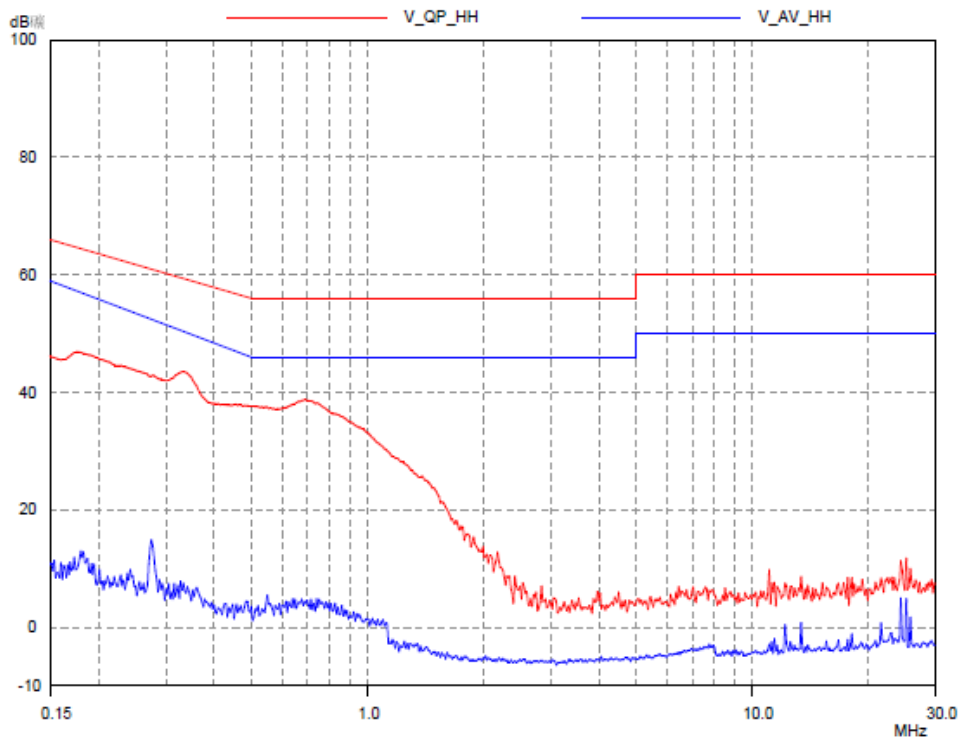

| Frequency (MHz) | Quasi-peak | | | Average | | |
|-----------------|--------------------------|--------------|-------------|--------------------------|--------------|-------------|
| | Corrected Reading (dBuV) | Limit (dBuV) | Margin (dB) | Corrected Reading (dBuV) | Limit (dBuV) | Margin (dB) |
| 0.18 | * | 64.41 | * | * | 56.94 | * |
| 0.24 | * | 61.76 | * | * | 53.49 | * |
| 0.37 | * | 58.44 | * | * | 49.17 | * |
| 0.61 | * | 56.00 | * | * | 46.00 | * |
| 0.83 | * | 56.00 | * | * | 46.00 | * |
| 1.36 | * | 56.00 | * | * | 46.00 | * |

Note: * means the emission level 10dB below the relevant limit.

- Remark:
1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming LISN Factor = 10.00dB, Cable Loss = 2.00dB,
Original Receiver Reading = 10.00dBuV, Limit = 66.00dBuV.
Then Correct Factor = 10.00 + 2.00 = 12.00dB;
Corrected Reading = 10dBuV + 12.00dB = 22.00dBuV;
Margin = 66.00dBuV – 22.00dBuV = 44.00dB.

For Associated ports: NA

| Frequency (MHz) | Quasi-peak | | | Average | | |
|---|--------------------------|--------------|-------------|--------------------------|--------------|-------------|
| | Corrected Reading (dBuV) | Limit (dBuV) | Margin (dB) | Corrected Reading (dBuV) | Limit (dBuV) | Margin (dB) |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Note: * means the emission level 20dB below the relevant limit. | | | | | | |


- Remark:
1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming LISN Factor = 10.00dB, Cable Loss = 2.00dB,
 Original Receiver Reading = 10.00dBuV, Limit = 66.00dBuV.
 Then Correct Factor = 10.00 + 2.00 = 12.00dB;
 Corrected Reading = 10dBuV + 12.00dB = 22.00dBuV;
 Margin = 66.00dBuV – 22.00dBuV = 44.00dB.

4. Mains terminal discontinuous disturbance voltage/click

Test result: NA

4.1 Block Diagram of Test Setup

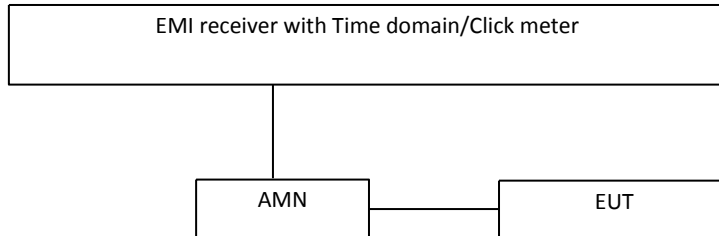

4.2 Test Setup and Test Procedure

Measurement was performed in shielded room, and instruments used were according to clause 5.1 of EN 55014-1 if applicable.

Detailed test procedure and arrangement was according to clause 5.2 of EN 55014-1.

Measurement methods was according to clause 5.4 of EN 55014-1.

Operation conditions of EUT was according to clause 6 of EN 55014-1.

0.15MHz, 0.5MHz, 1.4MHz and 30MHz were spot checked, and upper quartile methods used during measurement.

The final judgment of test result was according to figure 6 of EN 55014-1.

4.3 Test Protocol

| | | | | |
|--|------|------|------|------|
| Frequency (MHz) | 0.15 | 0.5 | 1.4 | 30.0 |
| Permitted limit for continuous interference (dB μ V) | 66.0 | 56.0 | 56.0 | 60.0 |
| Counted click/switch operation number | | | | |
| Observed time (min) | | | | |
| Click duration (ms) | | | | |
| Click rate N | | | | |
| Factor | | | | |
| Permitted limits for clicks (dB μ v) | | | | |
| Counted clicks exceeding the limits | | | | |
| Test result | | | | |
| Any other descriptions: | | | | |

5. Continuous disturbance power

Test result: **Pass**


5.1 Continuous disturbance power limit

| Frequency range (MHz) | General | | $P \leq 700 \text{ W}$ | | $700 \text{ W} < P \leq 1\,000 \text{ W}$ | | $P > 1\,000 \text{ W}$ | |
|-----------------------|----------------------------|---------|----------------------------|---------|---|---------|----------------------------|---------|
| | Limits dB(μV) | | Limits dB(μV) | | Limits dB(μV) | | Limits dB(μV) | |
| | Quasi-peak | Average | Quasi-peak | Average | Quasi-peak | Average | Quasi-peak | Average |
| 30-300 | 45-55* | 35-45* | 45-55* | 35-45* | 49-59* | 39-49* | 55-65* | 45-55* |

Notes:

- * means the limit decreasing linearly with the logarithm of the frequency in the range 30MHz to 300MHz.
- If the quasi-peak measurements meet the average limit, the EUT shall be deemed to meet both limits and the measurements using the average detector need not be carried out.

5.2 Block diagram of test set up

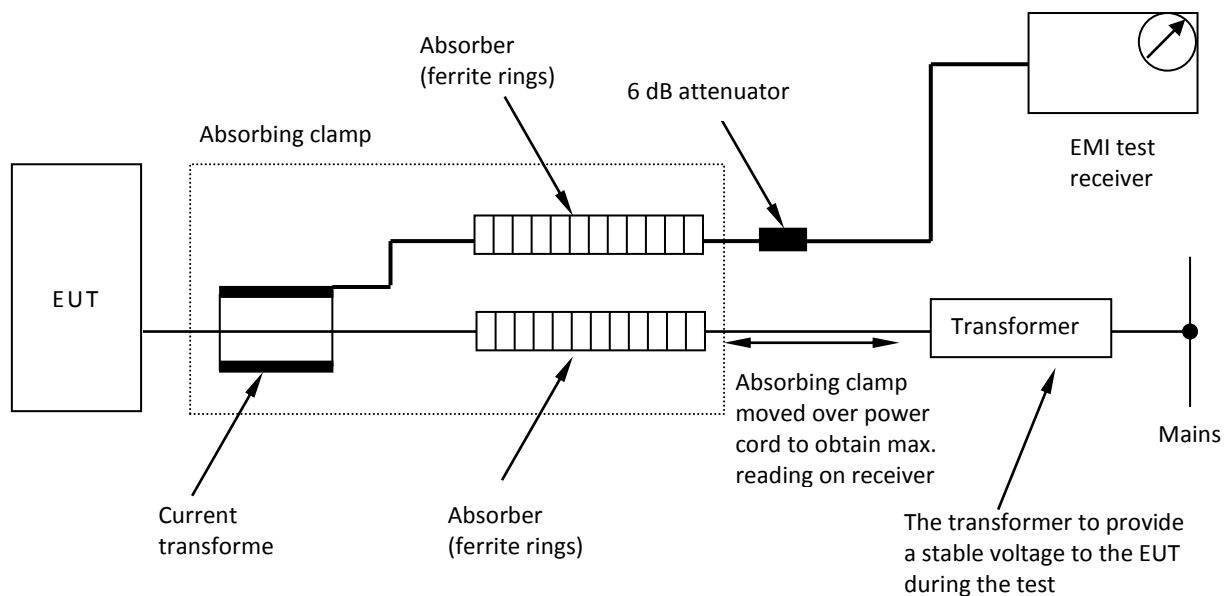

5.3 Test Procedure

Measurement was performed in shielded room, and instruments used were according to clause 5.1 of EN 55014-1 if applicable.

Detailed test procedure and arrangement was according to clause 5.3 of EN 55014-1.


Measurement methods was according to clause 5.4 of EN 55014-1.

Operation conditions of EUT was according to clause 6 of EN 55014-1.

Frequency range 30MHz – 300MHz was checked and EMI receiver measurement bandwidth was set to 120kHz.

5.4 Test Protocol

For Mains ports: Pass

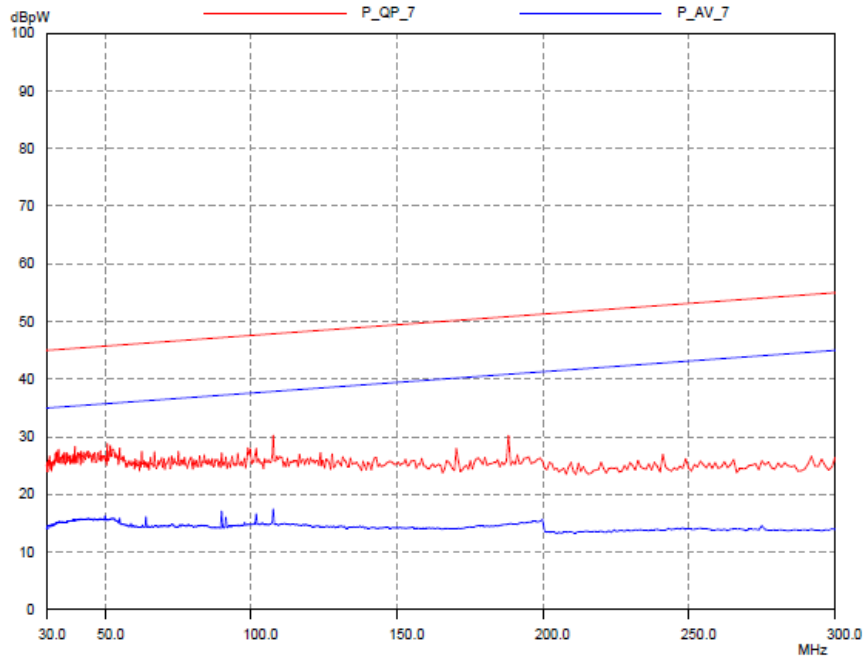

| Frequency (MHz) | Quasi-peak | | | Average | | |
|-----------------|--------------------------|--------------|-------------|--------------------------|--------------|-------------|
| | Corrected Reading (dBuV) | Limit (dBuV) | Margin (dB) | Corrected Reading (dBuV) | Limit (dBuV) | Margin (dB) |
| 30.00 | * | 45.0 | * | * | 35.0 | * |
| 35.05 | * | 45.2 | * | * | 35.2 | * |
| 65.00 | * | 46.3 | * | * | 36.3 | * |
| 90.00 | * | 47.2 | * | * | 37.2 | * |
| 180.00 | * | 50.6 | * | * | 40.6 | * |
| 220.00 | * | 52.0 | * | * | 42.0 | * |
| 300.00 | * | 55.0 | * | * | 45.0 | * |

Note: * means the emission level 10dB below the relevant limit.

- Remark: 1. Correct Factor = Clamp Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Clamp Factor = 10.00dB, Cable Loss = 2.00dB,
 Original Receiver Reading = 10.00dBuV, Limit = 66.00dBuV.
 Then Correct Factor = 10.00 + 2.00 = 12.00dB;
 Corrected Reading = 10dBuV + 12.00dB = 22.00dBuV;
 Margin = 66.00dBuV – 22.00dBuV = 44.00dB.

For Associated ports: NA

| Frequency (MHz) | Quasi-peak | | | Average | | |
|---|--------------------------|--------------|-------------|--------------------------|--------------|-------------|
| | Corrected Reading (dBuV) | Limit (dBuV) | Margin (dB) | Corrected Reading (dBuV) | Limit (dBuV) | Margin (dB) |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Note: * means the emission level 20dB below the relevant limit. | | | | | | |

- Remark:
1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming LISN Factor = 10.00dB, Cable Loss = 2.00dB,
 Original Receiver Reading = 10.00dBuV, Limit = 66.00dBuV.
 Then Correct Factor = 10.00 + 2.00 = 12.00dB;
 Corrected Reading = 10dBuV + 12.00dB = 22.00dBuV;
 Margin = 66.00dBuV – 22.00dBuV = 44.00dB.

6. Radiated emission

Test result: PASS

As for in the disturbance power test all emission readings from the EUT are lower than the applicable limits (Table 7) reduced by the margin (Table 8) and the maximum clock frequency is less than 30MHz, the EUT is deemed to comply with the Radiated Emission requirement without test.

6.1 Limit


Radiated emission limit from frequency range 30MHz – 1000MHz

| Frequency (MHz) | Permitted limit in dB μ V/m (Quasi-peak) of Measurement Distance 3m | Permitted limit in dB μ V/m (Quasi-peak) of Measurement Distance 10m |
|-----------------|--|---|
| 30 ~ 230 | 40 | 30 |
| 230 ~ 300 | 47 | 37 |

Notes:

- For the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades.
- The gray rows are selected items.

6.2 Block diagram and test set up

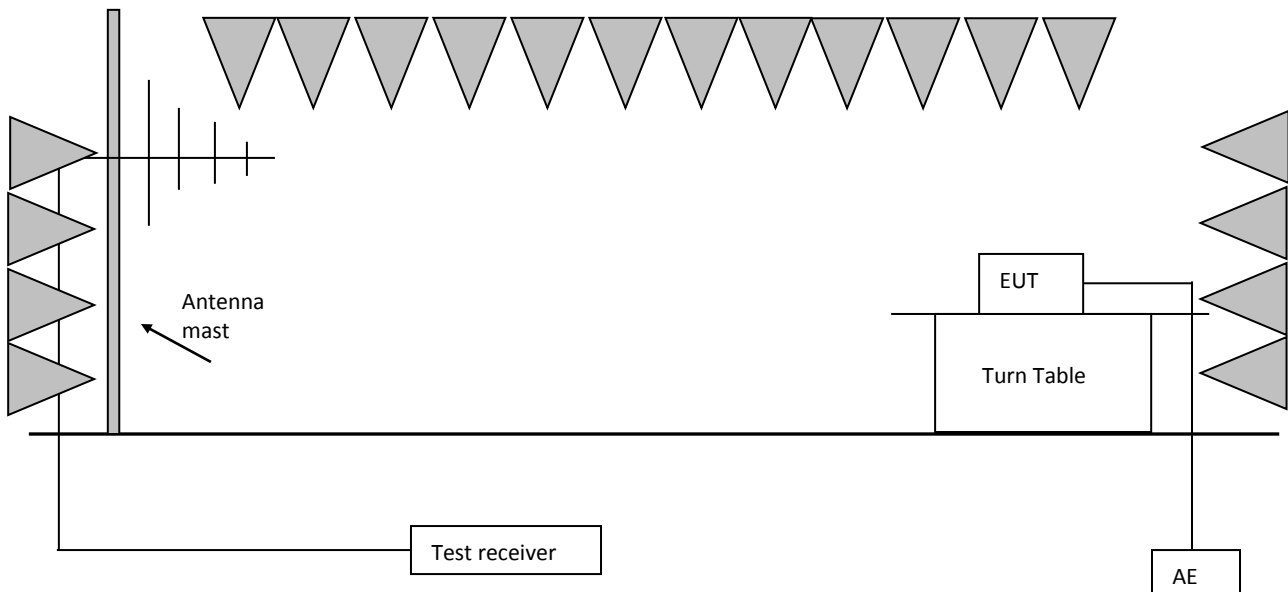


The measurement was applied in a semi-anechoic chamber.
 Operation conditions of EUT was according to clause 6 of EN 55014-1.
 Measurement was performed according to clause 10 of CISPR 32.
 Setting of EUT is according to clause 5.3.4.3 of EN 55014-1.
 The bandwidth setting on test receiver was 120kHz.
 The frequency range from 30MHz to 300MHz was checked.


6.3 Test Protocol

EUT operating in working normally mode (not in battery charging mode)

Horizontal

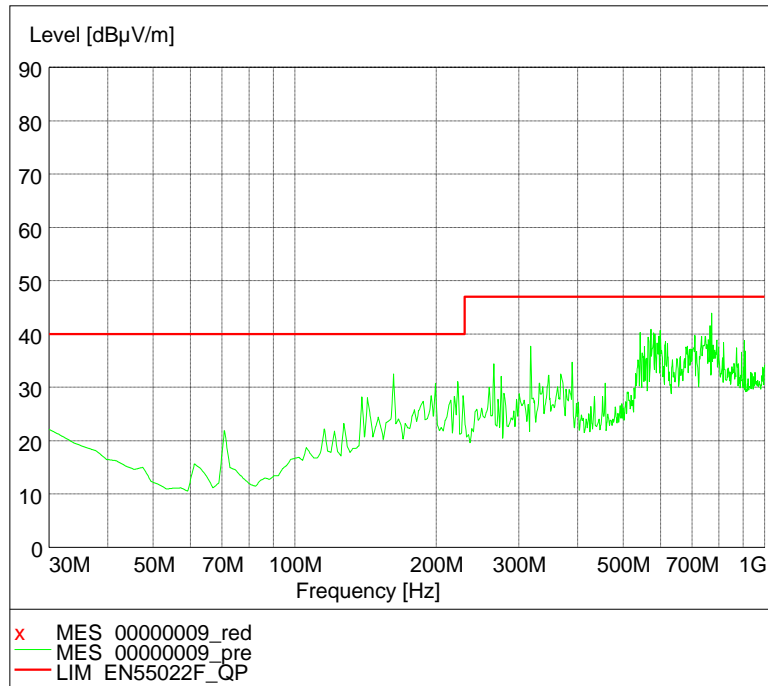

Vertical

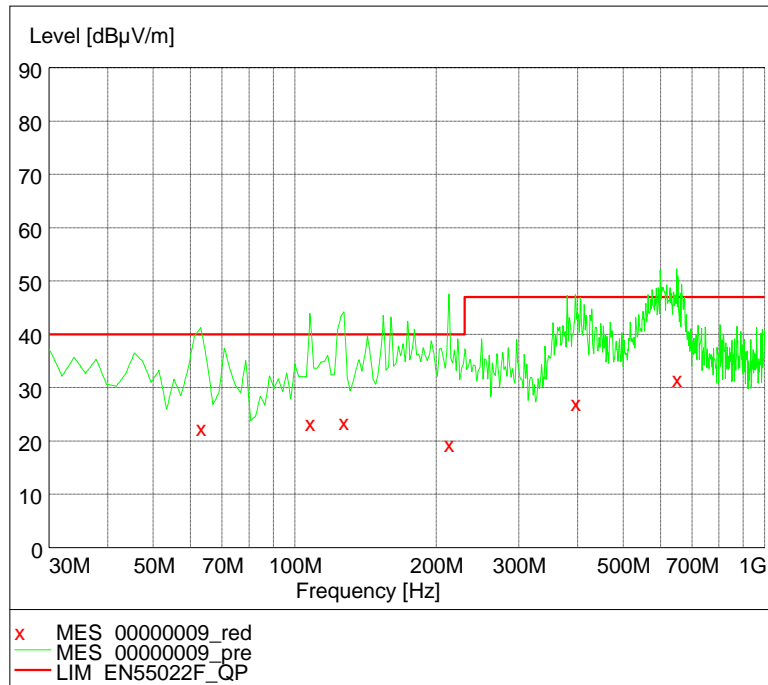

| Polarization | Frequency (MHz) | Corrected Reading (dBuV/m) | Limits (dBuV/m) | Margin (dBuV/m) |
|--------------|-----------------|----------------------------|-----------------|-----------------|
| Horizontal | 53.32 | * | 40.00 | * |
| | 166.07 | * | 40.00 | * |
| | 220.50 | * | 40.00 | * |
| | 232.16 | * | 47.00 | * |
| | 679.25 | * | 47.00 | * |
| | 873.64 | * | 47.00 | * |
| Vertical | 63.05 | 22.78 | 40.00 | 17.22 |
| | 107.76 | 23.81 | 40.00 | 16.19 |
| | 127.19 | 23.89 | 40.00 | 16.11 |
| | 212.73 | 19.84 | 40.00 | 20.16 |
| | 395.45 | 27.46 | 47.00 | 19.54 |
| | 650.10 | 31.95 | 47.00 | 15.05 |

Note: * means the emission level 10dB below the relevant limit.


- Remark: 1. Corrected Reading = Original Receiver Reading + Correct Factor
 2. Margin = Limit - Corrected Reading
 3. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
 Limit = 40.00dBuV/m.
 Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m;
 Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

7. Harmonics

Test result: **PASS**

7.1 Block Diagram of Test Setup

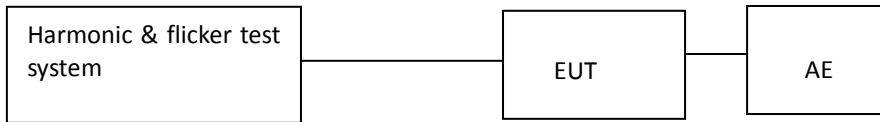

7.2 Test Setup and Test Procedure

Harmonics of the fundamental current were measured up to 40 order harmonics using a digital power meter with an analogue output and frequency analyser which was integrated in the harmonic & flicker test system. The measurements were carried out under steady conditions.


- Measuring instrumentation according to IEC 61000-4-7:2002+A1:2008
- This product is not defined as lighting equipment, and has rated power less than 75W, therefore, no limit apply according to EN 61000-3-2
- The EUT is kitchen machines as listed in the scope of IEC 60335-2-14, therefore, is deemed to conform to the harmonic current limits of this standard without further testing.

7.3 Test Protocol

8. Voltage Fluctuations-Flicker

Test result: **PASS**

8.1 Block Diagram of Test Setup

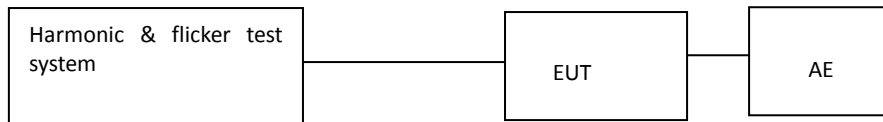

8.2 Test Setup and Test Procedure

8.2.1 Definition

Flicker: impression of unsteadiness of visual sensation induced by a light stimulus whose luminance or spectral distribution fluctuates with time.

Pst: Short-term flicker severity.

Plt: long-term flicker severity.

dc: maximum steady state voltage change during an observation period.

dmax: maximum absolute voltage change during an observation period.

d(t): time function of the relative r.m.s. voltage change evaluated as a single value for each successive half period between zero-crossings of the source voltage, except during time interval in which the voltage is a steady-state condition for at least 1s.

8.2.2 Test condition

The EUT was set to produce the most unfavorable sequence of voltage changes.

8.3 Test Protocol

The tested object operated under the operating condition specified in EN 61000-3-3
The following limits apply

- the value of Pst shall not be greater than 1,0.
- the value of Plt shall not be greater than 0,65.
- Tmax, the accumulated time value of d(t) with a deviation exceeding 3,3 % during a single voltage change at the EUT terminals, shall not exceed 500 ms.
- the maximum relative steady-state voltage change, dc, shall not exceed 3,3 %.
- the maximum relative voltage change dmax, shall not exceed:
 - 4% without additional conditions.
 - 6 % for equipment which is:
 - switched manually, or
 - switched automatically more frequently than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds), or manual restart, after a power supply interruption.
 - 7 % for equipment which is:
 - attended whilst in use (for example: hair dryers, vacuum cleaners, kitchen equipment such as mixers, garden equipment such as lawn mowers, portable tools such as electric drills), or
 - switched on automatically, or is intended to be switched on manually, no more than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds) or manual restart, after a power supply interruption.
 - for manual switch, dmax is measured in accordance with Annex B of standard, average dmax is calculated from 24 times measurement.
 - According to EN 61000-3-3 clause 6.1 & A.2, the EUT is either unlikely to produce significant voltage fluctuations/flicker or no limit and test were required by technical analysis and sample evaluation on the product.

Immunity Test

Performance criteria

The performance criteria are based on the general criteria of the standard and derived from the product specification

Criterion A: Normal Performance within limits specified by the manufacturer, request or purchaser.

Criterion B: Continue to operate as intended after the test. No degradation of performance or loss of function. During the test degradation of performance is allowed, however no change of actual operating state or stored date.

Criterion C: Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.

Categories of apparatus

- Category I (fulfill the relevant immunity requirements without testing)
- Category II (Shall fulfill the tests: ESD, EFT, Inject current, Surge, Dips)
- Category III (Shall fulfill the tests: ESD, EM fields*)
- Category IV (Shall fulfill the tests: ESD, EFT, Inject current, Surge, Dips, EM fields)

Note: *only applicable to the ride on toys operating with electronic devices.

9. Electrostatic Discharge (ESD)

Test result: **PASS**

9.1 Severity Level and Performance Criterion

9.1.1 Test level

| 1a – Contact discharge | | 1b – Air discharge | |
|------------------------|--------------------|--------------------|--------------------|
| Level | Test voltage kV | Level | Test voltage kV |
| 1 | 2 | 1 | 2 |
| 2 | 4 | 2 | 4 |
| 3 | 6 | 3 | 8 |
| 4 | 8 | 4 | 15 |
| X | Special | X | Special |

Notes:


- “X” is an open level. The level has to be specified in the dedicated equipment specification. If higher voltages than those shown are specified, special test equipment may be needed.
- The gray rows were the selected test level.

9.1.2 Performance Criterion

Performance criterion: **B**


9.2 Block Diagram of Test Setup

For table-top equipment

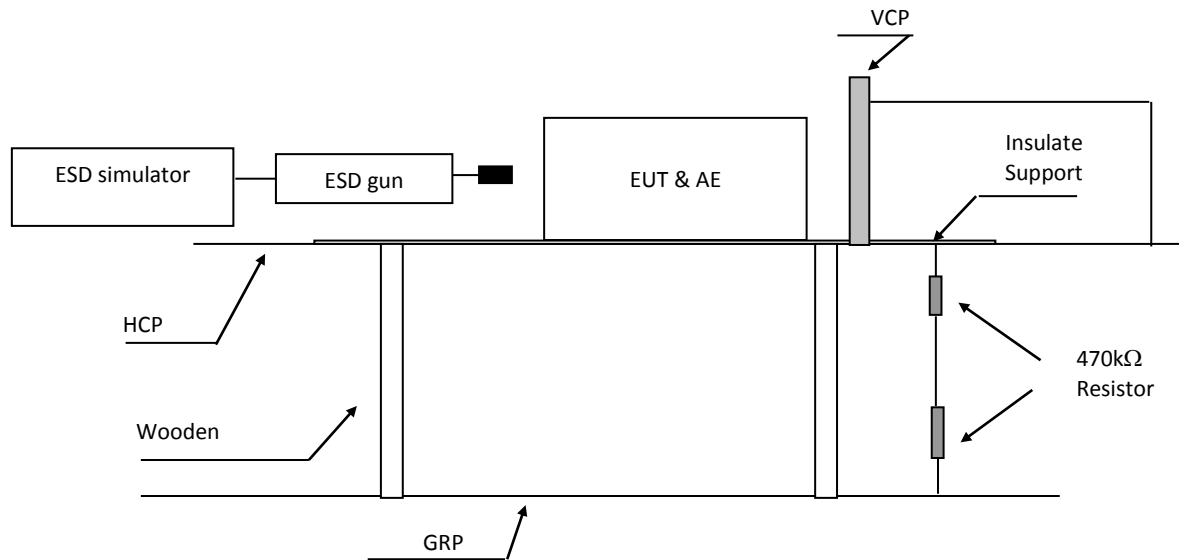

Note: HCP means Horizontal Coupling Plane
 VCP means Vertical Coupling Plane
 GRP means Ground Reference Plane
 Wooden support is a 0.8m height table

For floor standing equipment

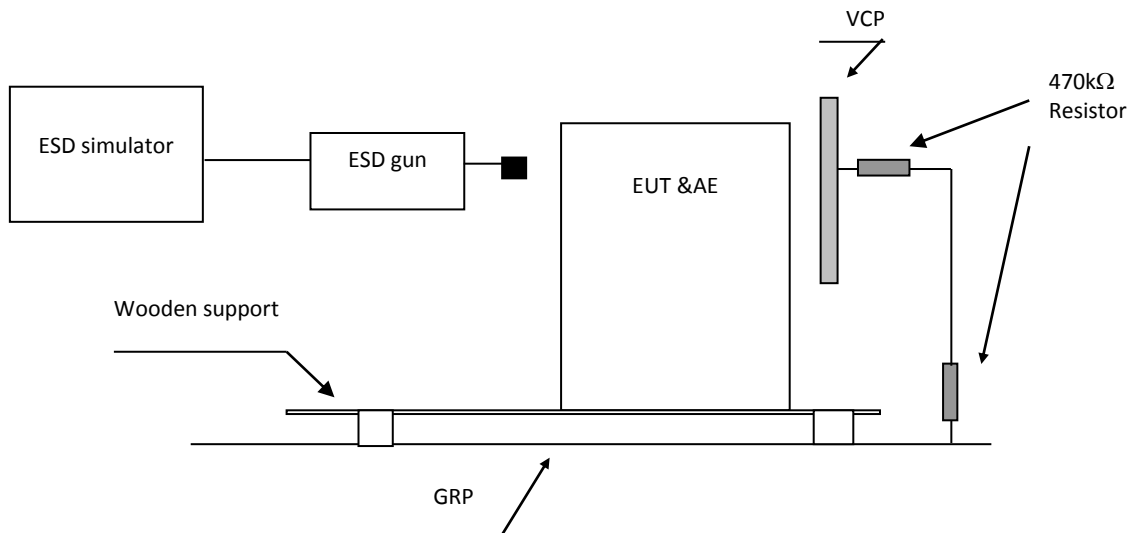

Note: VCP means Vertical Coupling Plane
 GRP means Ground Reference Plane
 Wooden support is a 0.1m height rack

9.3 Test Setup and Test Procedure

Measurement was performed in shielded room.

Measurement and setting of EUT was applied according to IEC 61000-4-2 Clause 7.

The test method and equipment was specified by IEC 61000-4-2 with the modifications by EN 55014-2 clause 5.1.

9.4 Test Protocol

Direct discharges were applied at the following selected points:

| Test point # | Test level [kV] | Air/Contact | Polarity (+/-) | Pass/Fail/NA | Comment |
|--------------|-----------------|-------------|----------------|--------------|-----------------------------------|
| A | 2/4 | Contact | +/- | Pass | All touchable screws of enclosure |
| B | 2/4 | Contact | +/- | Pass | Accessible metal parts of the EUT |
| C | 2/4/8 | Air | +/- | Pass | Air gap of the switch, button |
| D | 2/4/8 | Air | +/- | Pass | The air in-taking opening |
| E | 2/4/8 | Air | +/- | Pass | Slots around the EUT |

Indirect contact discharges were applied to the VCP and the HCP at the following selected points:

For table top equipment

| Point | Description | Point | Pass/Fail/NA |
|-------|-------------------------------------|-------------------------------|--------------|
| HCP f | 0,1m from the front of the EUT | Edge of centre, corner on HCP | - |
| HCP b | 0,1m from the back of the EUT | Edge of centre, corner on HCP | - |
| HCP r | 0,1m from the right side of the EUT | Edge of centre, corner on HCP | - |
| HCP l | 0,1m from the left side of the EUT | Edge of centre, corner on HCP | - |
| VCP f | 0,1m from the front of the EUT | Edge of centre, corner on VCP | - |
| VCP b | 0,1m from the back of the EUT | Edge of centre, corner on VCP | - |
| VCP r | 0,1m from the right of the EUT | Edge of centre, corner on VCP | - |
| VCP l | 0,1m from the left of the EUT | Edge of centre, corner on VCP | - |

For floor standing equipment

| Point | Description | Point | Pass/Fail/NA |
|-------|--------------------------------|-------------------------------|--------------|
| VCP f | 0,1m from the front of the EUT | Edge of centre, corner on VCP | Pass |
| VCP b | 0,1m from the back of the EUT | Edge of centre, corner on VCP | Pass |
| VCP r | 0,1m from the right of the EUT | Edge of centre, corner on VCP | Pass |
| VCP l | 0,1m from the left of the EUT | Edge of centre, corner on VCP | Pass |

Observation: All the functions were operated as normal during and after test.

Conclusion: The EUT met the requirements of Performance Criterion B.

10. Electromagnetic field susceptibility

Test result: Pass

10.1 Severity Level and Performance Criterion

10.1.1 Test level

| Level | Test field strength V/m |
|-------|-------------------------|
| 1 | 1 |
| 2 | 3 |
| 3 | 10 |
| X | Special |


Notes:

- X is an open test level. This level may be given in the product specification.
- The gray row is the selected test level.

10.1.2 Performance Criterion

Performance criterion: **A**

10.2 Block diagram of test setup

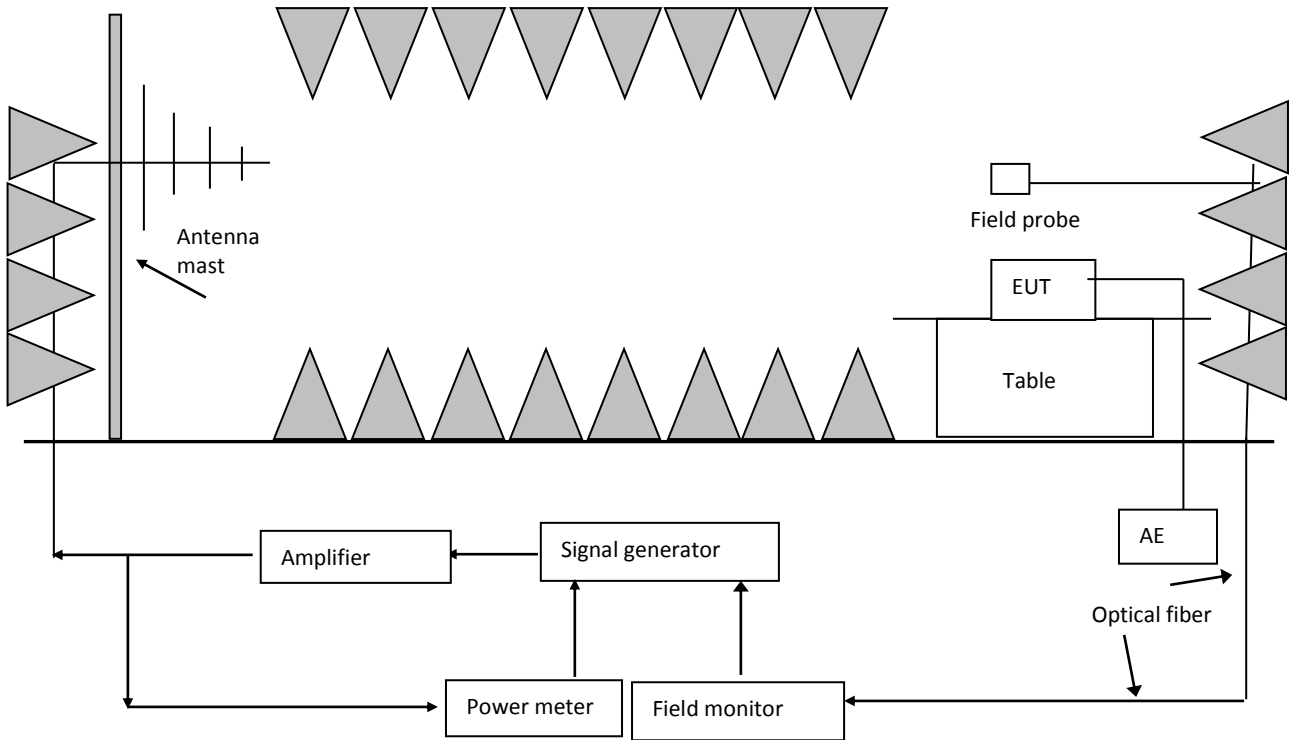

10.3 Test Setup and Test Procedure

Measurement was performed in full-anechoic chamber.

Measurement and setting of EUT was applied according to IEC 61000-4-3 clause 7.

The test method and equipment was specified by IEC 61000-4-3 with additions and modifications by EN 55014-2 clause 5.5.

10.4 Test Protocol

| Test no.: | Frequency (MHz) | Polarization | Test level V/m | Modulation | Exposed location | Pass/Fail/NA | Comment |
|-----------|-----------------|--------------|----------------|---------------------------------|------------------|--------------|---------|
| 1 | 80-1000 | H & V | 3 | 1kHz, 80%, SW, AM, 1% step size | All sides | Pass | - |

Observation: All the functions were operated as normal during and after test.

Conclusion: The EUT met the requirements of Performance Criterion A.

11. Electric Fast Transient/Burst Immunity Test

Test result: **PASS**

11.1 Severity Level and Performance Criterion

11.1.1 Test level

| Open circuit output test voltage ($\pm 10\%$) and repetition rate of the impulses ($\pm 20\%$) | | | | |
|--|-----------------------------------|------------------------|---|------------------------|
| Level | Input and output a.c. power ports | | Input and output d.c. power ports Signal lines and control lines ports | |
| | Voltage peak kV | Repetition rate kHz | Voltage peak kV | Repetition rate kHz |
| 1 | 0.5 | 5 | 0.25 | 5 |
| 2 | 1 | 5 | 0.5 | 5 |
| 3 | 2 | 5 | 1 | 5 |
| 4 | 4 | 5 | 2 | 5 |
| X | Special | Special | Special | Special |

Notes :

1. "X" is an open level. The level has to be specified in the dedicated equipment specification.
2. The gray rows were the selected test level.


11.1.2 Performance Criterion

Performance criterion **B**


11.2 Block Diagram of Test Setup

11.2.1 Block Diagram for input a.c./d.c. power line

For table-top equipment

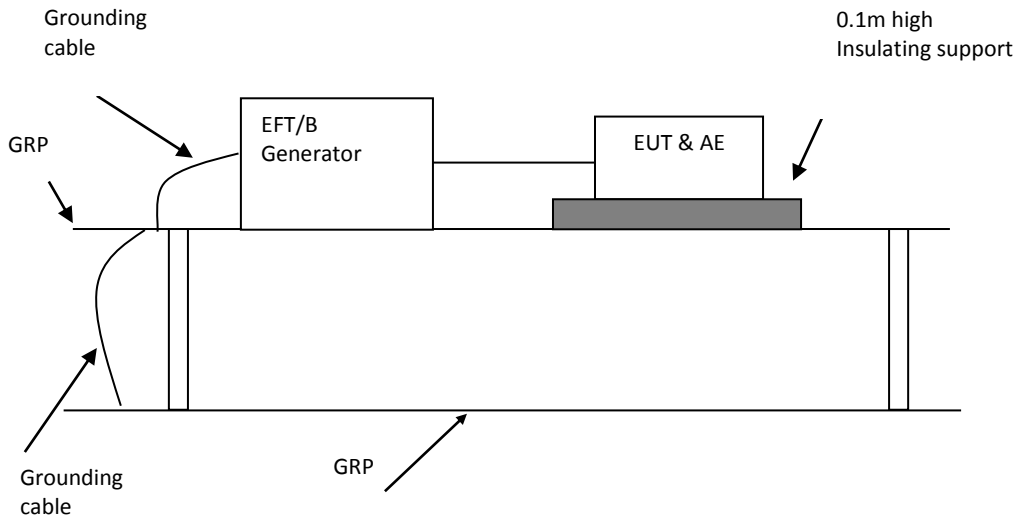


For floor standing equipment

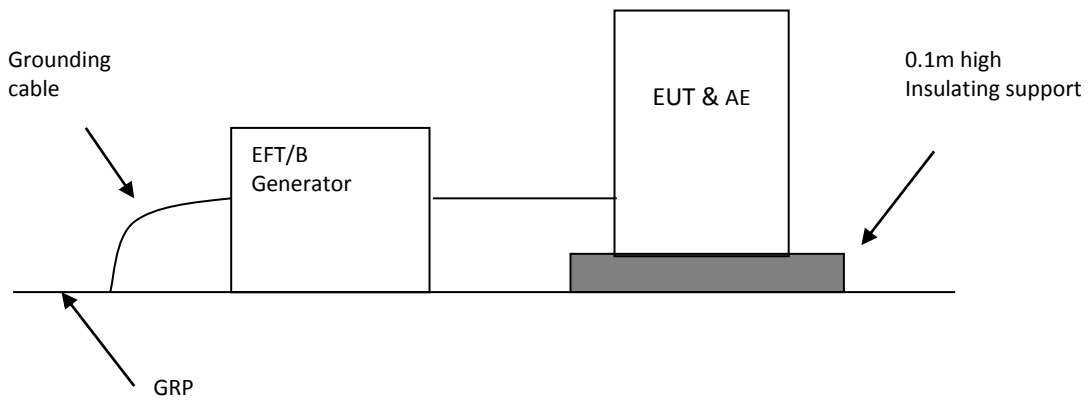


11.2.2 Block Diagram for output a.c./d.c. power line or signal/control lines

For table-top equipment

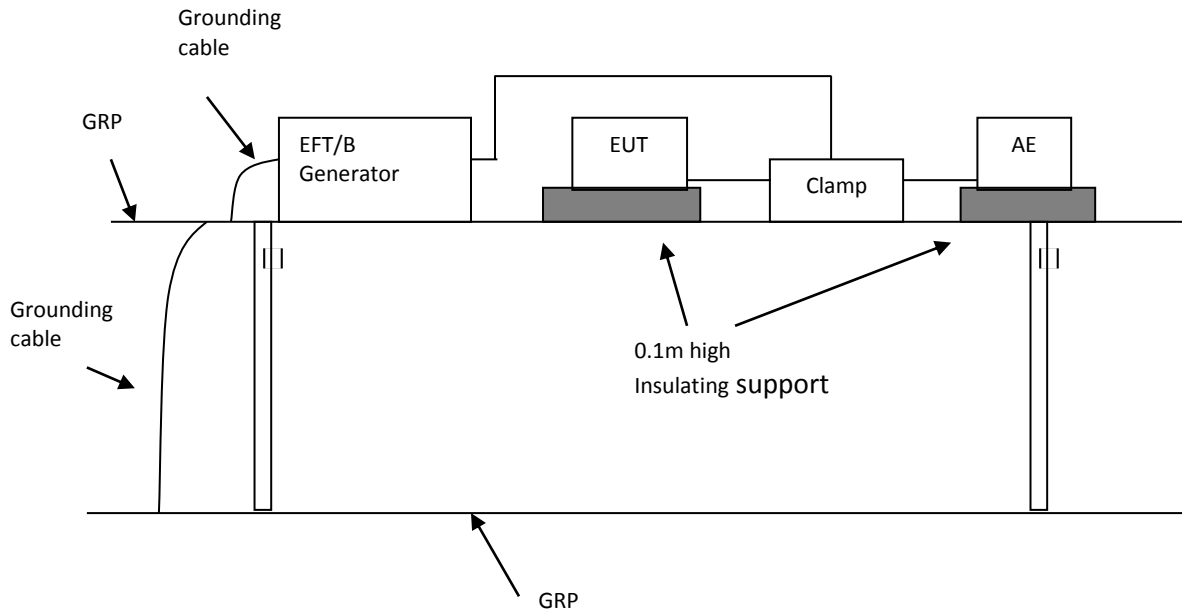

For floor standing equipment

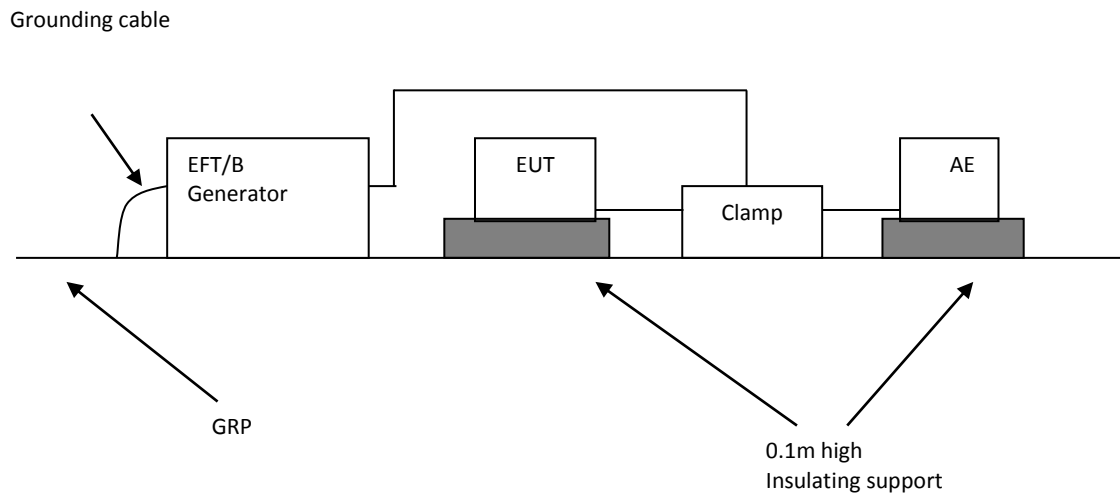

11.3 Test Setup and Test Procedure

Measurement was performed in shielded room.

Measurement and setting of EUT was applied according to IEC 61000-4-4 clause 7.

The test method and equipment was specified by IEC 61000-4-4 with additions and modifications by EN 55014-2 clause 5.2.

11.4 Test Protocol

| Test No. | Level [kV] | Polarity +/- | Repetition rate kHz | Line for test | Pass/Fail/NA |
|----------|------------|--------------|---------------------|--------------------------------|--------------|
| 1 | 1 | +/- | 5 | a.c. power ports | Pass |
| 2 | 0.5 | +/- | 5 | d.c. power ports | NA |
| 3 | 0.5 | +/- | 5 | Signal lines and control lines | NA |

Observation: All the functions were operated as normal during and after test.

Conclusion: The EUT met the requirements of Performance Criterion B.

12. Surge Immunity Test

Test result: **PASS**

12.1 Severity Level and Performance Criterion

12.1.1 Test level

| Level | Open-circuit test voltage ±10% kV |
|-------|--------------------------------------|
| 1 | 0.5 |
| 2 | 1.0 |
| 3 | 2.0 |
| 4 | 4.0 |
| X* | Special |


Notes:

- "X" is an open class. This level can be specified in the product Specification
- The gray rows are the selected level.

12.1.2 Performance Criterion

Performance criterion **B**

12.2 Block Diagram of Test Setup

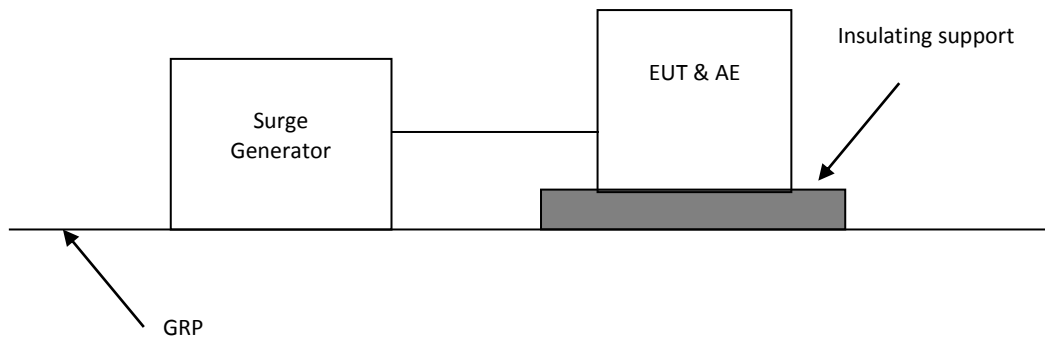

12.3 Test Setup and Test Procedure

Measurement was performed in shielded room.

Measurement and setting of EUT was applied according to IEC 61000-4-5 clause 7.

The test method and equipment was specified by IEC 61000-4-5 with modifications by EN 55014-2 clause 5.6.

12.4 Test Protocol

| Test No. | Level [kV] | Polarity +/- | Angle | Line for test | Pass/Fail/NA |
|----------|------------|--------------|------------------|----------------------------|--------------|
| 1 | 1 | + | 90 ⁰ | a.c. Mains (line to earth) | NA |
| 2 | 1 | - | 270 ⁰ | a.c. Mains (line to earth) | NA |
| 3 | 1 | + | 90 ⁰ | a.c. Mains (line to line) | Pass |
| 4 | 1 | - | 270 ⁰ | a.c. Mains (line to line) | Pass |
| 5 | 2 | + | 90 ⁰ | a.c. Mains (line to earth) | NA |
| 6 | 2 | - | 270 ⁰ | a.c. Mains (line to earth) | NA |

Observation: All the functions were operated as normal during and after test.

Conclusion: The EUT met the requirements of Performance Criterion B.

13. Immunity to Conducted Disturbances, Induced by Radio-frequency Fields

Test result: PASS

13.1 Severity Level and Performance Criterion

13.1.1 Test level

| Frequency range 150kHz – 80MHz | | |
|--------------------------------|------------------------|-----------|
| Level | Voltage level (e.m.f.) | |
| | U_0 [dB(μ V)] | U_0 (V) |
| 1 | 120 | 1 |
| 2 | 130 | 3 |
| 3 | 140 | 10 |
| X | Special | Special |

Notes:

1. "X" is an open level.
2. The gray row is the selected test level.


13.1.2 Performance Criterion

Performance criterion: **A**

13.2 Block Diagram of Test Setup


13.2.1 Block Diagram for a.c./d.c input power line

Block Diagram for a.c./d.c input power line

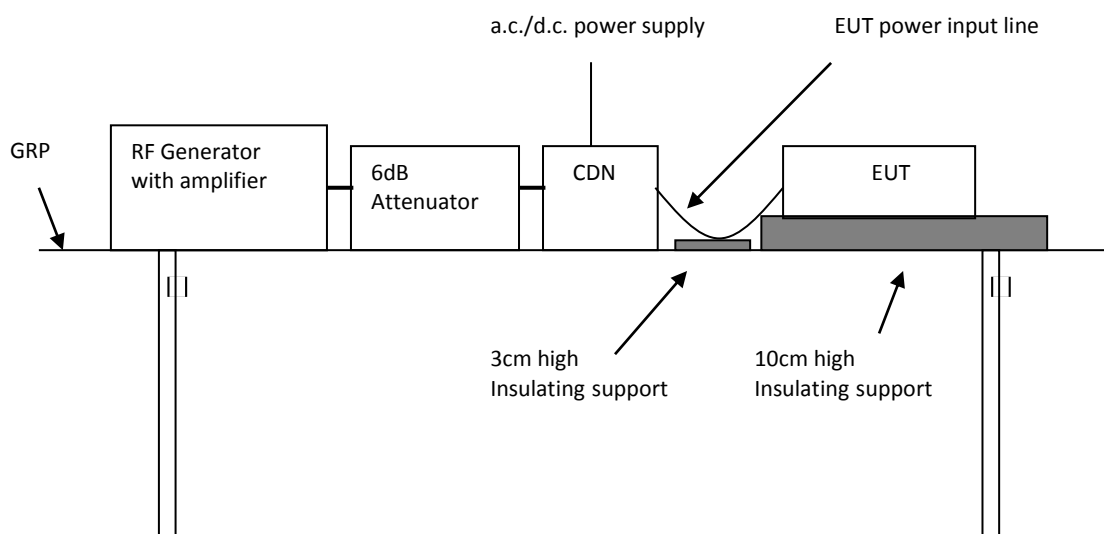


13.2.2 Block Diagram for output a.c./d.c. power line or signal/control lines

Unshielded line

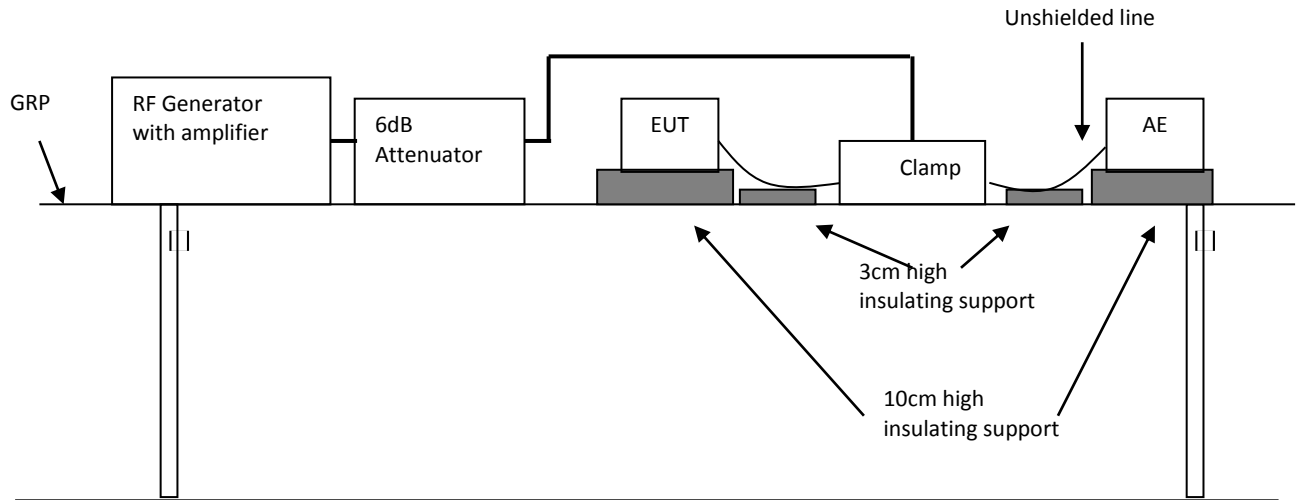

Shielded line

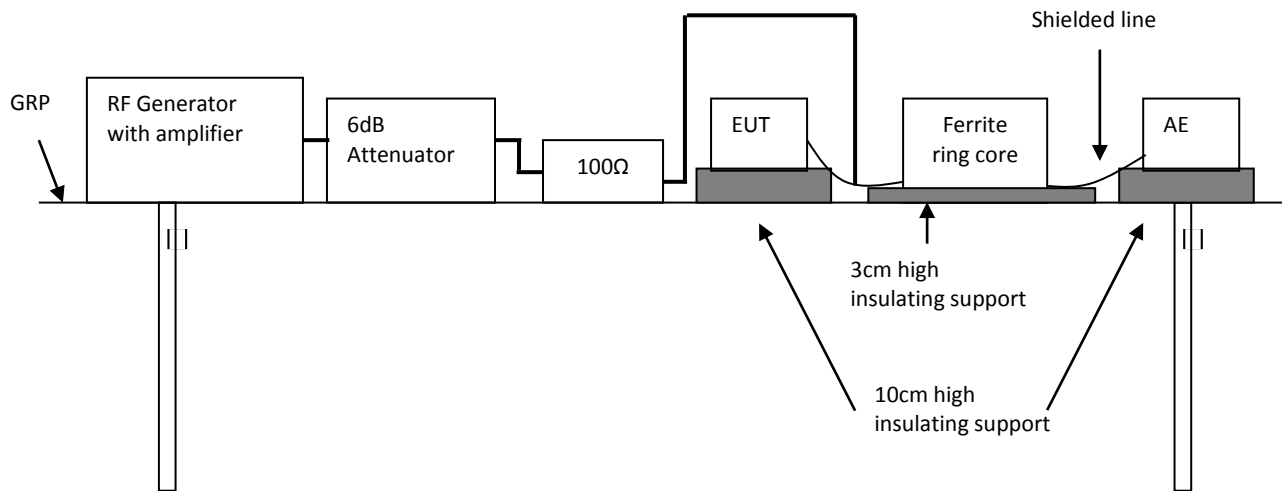

13.3 Test Setup and Test Procedure

Measurement was performed in shielded room.

Measurement and setting of EUT was applied according to IEC 61000-4-6 clause 7.

The test method and equipment was specified by IEC 61000-4-6 with additions and modifications by EN 55014-2 clause 5.3, 5.4.

13.4 Test Protocol

EUT is not required for electromagnetic susceptibility

| Test No. | Frequency (MHz) | Level V (r.m.s.) | Modulation | Injected point | Pass/Fail/NA |
|----------|-----------------|------------------|---------------------------------|--------------------------------|--------------|
| 1 | 0.15~230 | 3 | 1kHz, 80%, SW, AM, 1% step size | a.c. power ports | Pass |
| 2 | 0.15~230 | 1 | 1kHz, 80%, SW, AM, 1% step size | d.c. power ports | - |
| 3 | 0.15~230 | 1 | 1kHz, 80%, SW, AM, 1% step size | signal lines and control lines | - |

For EUT test Electromagnetic field susceptibility

| Test No. | Frequency (MHz) | Level V (r.m.s.) | Modulation | Injected point | Pass/Fail/NA |
|----------|-----------------|------------------|---------------------------------|--------------------------------|--------------|
| 1 | 0.15~80 | 3 | 1kHz, 80%, SW, AM, 1% step size | a.c. power ports | NA |
| 2 | 0.15~80 | 1 | 1kHz, 80%, SW, AM, 1% step size | d.c. power ports | - |
| 3 | 0.15~80 | 1 | 1kHz, 80%, SW, AM, 1% step size | signal lines and control lines | - |

Observation: All the functions were operated as normal during and after test.

Conclusion: The EUT met the requirements of Performance Criterion A.

14. Voltage Dips, Short Interruptions and Voltage Variations Immunity Test

Test result: PASS

14.1 Severity Level and Performance Criterion

14.1.1 Test level

| Test level % U _T | Voltage dip and short interruptions % U _T | Duration (in period) | |
|--------------------------------|---|-------------------------|-----------|
| | | 50Hz | 60Hz |
| 0 | 100 | 0.5 cycle | 0.5 cycle |
| 40 | 60 | 10 cycles | 12 cycles |
| 70 | 30 | 25 cycles | 30 cycles |


Notes:

1. “*” for 0.5 period, the test shall be made in positive and negative polarity, i.e. starting at 0° and 180°, respectively.
2. “**” means “x” is an open duration. This duration can be given in the product specification. Utilities in Europe have measured dips and short interruptions of duration between ½ a period and 3000 periods, but duration less than 50 periods are most common.
3. If the EUT is tested for voltage dips of 100%, it is generally unnecessary to test for other levels for the same durations. However, for some cases (safeguard systems or electro-mechanical devices) it is not true. The product specification or product committee shall give an indication of the applicability of this note.
4. The gray rows are selected test level.

14.1.2 Performance Criterion

Performance criterion: **C**

14.2 Block diagram of test setup

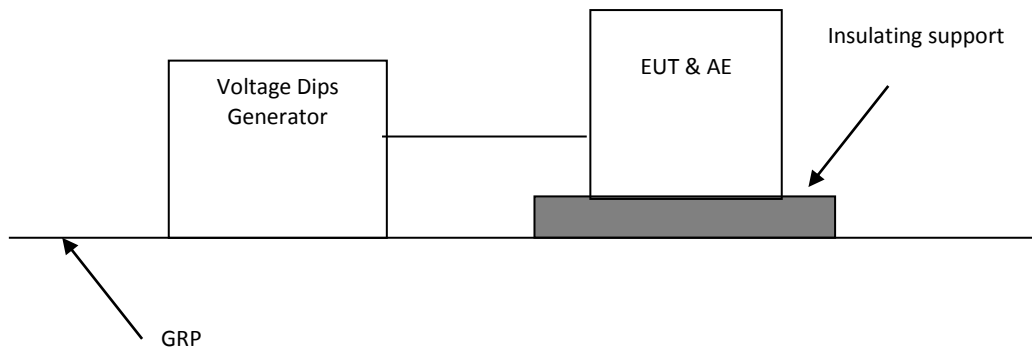

14.3 Test Setup and Test Procedure

Measurement was performed in shielded room.

Measurement and setting of EUT was applied according to IEC 61000-4-11 clause 7.

The test method and equipment was specified by IEC 61000-4-11 with additions and modifications by EN 55014-2 clause 5.7.

14.4 Test Protocol


| Test no. | % U_T | Voltage dip and short interruptions % U_T | Duration (in periods) | Pass/Fail/NA |
|----------|---------|---|-----------------------|--------------|
| 1 | 70 | 30% | 25 cycles at 50Hz | Pass |
| | | | 30 cycles at 60Hz | Pass |
| 2 | 40 | 60% | 10 cycles at 50Hz | Pass |
| | | | 12 cycles at 60Hz | Pass |
| 3 | 0 | 100% pos half cycle | 0.5 cycle at 50Hz | Pass |
| | | | 0.5 cycle at 60Hz | Pass |
| 4 | 0 | 100% neg half cycle | 0.5 cycle at 50Hz | Pass |
| | | | 0.5 cycle at 60Hz | Pass |

Observation: At test level of 70%, the EUT worked unsteadily. Once the interference is removed, it recovered its normal mode at once

Conclusion: The EUT met the requirements of Performance Criterion B.

Appendix I: Photograph of equipment under test



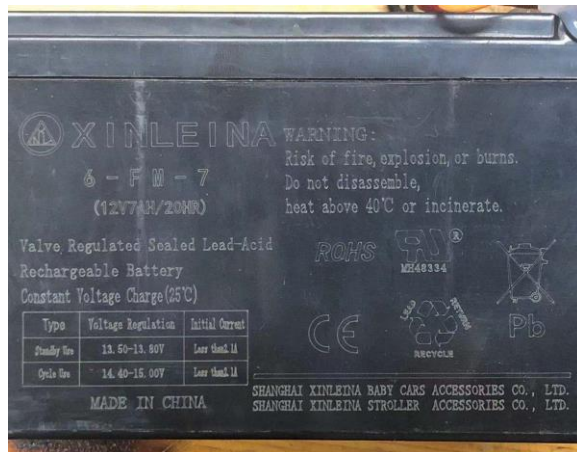

*****END of the report*****